


FLEXOSPAN Z PURLIN AND GIRT SECTION PROPERTIES

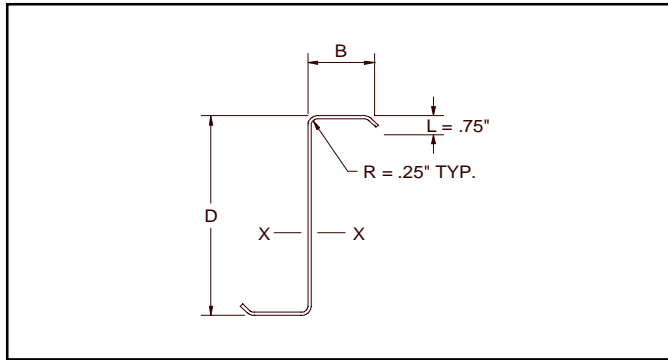

SECTION PROPERTIES (ZEES)

SECTION				AXIS X-X			AXIS Y-Y		
D X B	GA	WEIGHT LB/LF	AREA IN ²	I _x IN ⁴	S _x IN ³	R _x IN	I _y IN ⁴	S _y IN ³	R _y IN
6 X 2.5 Z	16	2.4534	0.72158	4.1433	1.3811	2.3962	1.237	0.4123	1.3093
	14	3.0522	0.89769	5.1248	1.7083	2.3893	1.5253	0.5096	1.3035
	12	4.2387	1.2467	7.0351	2.345	2.3755	2.0806	0.6987	1.2919
8 X 2.5 Z	16	2.86	0.84118	8.0884	2.0221	3.1009	1.237	0.4123	1.2127
	14	3.5601	1.0471	10.021	2.5053	3.0936	1.525	0.5096	1.207
	12	4.95	1.4559	13.802	3.4506	3.079	2.081	0.6987	1.1955
8 X 3.5 Z	14	4.0681	1.1965	12.367	3.0918	3.215	3.528	0.8836	1.7172
	12	5.6613	1.6651	17.063	4.2657	3.2011	4.843	1.2175	1.7055
10 X 2.5 Z	14	4.0681	1.1965	17.012	3.4023	3.7707	1.525	0.5097	1.1291
	12	5.6613	1.6651	23.481	4.6963	3.7553	2.081	0.6988	1.1179
10 X 3.5 Z	14	4.576	1.3459	20.691	4.1382	3.9209	3.528	0.8836	1.6191
	12	6.3726	1.8743	28.603	5.7205	3.9065	4.844	1.2176	1.6076
12 X 2.5 Z	14	4.576	1.3459	26.395	4.3992	4.4285	1.525	0.5097	1.0646
	12	6.3726	1.8743	36.491	6.0817	4.4124	2.081	0.6989	1.0538
12 X 3.5 Z	14	5.084	1.4953	31.707	5.2845	4.6048	3.528	0.8837	1.5361
	12	7.0839	2.0835	43.891	7.3152	4.5898	4.844	1.2176	1.5247
Flexospan - 253 Railroad St. Sandy Lake, PA 16145 - 1-800-245-0396									